

# SECURITHERM BIOCLIP

## thermostatic basin mixer

Ref. H9605

Single hole, sequential thermostatic mixer H. 95mm L. 120mm










### DESCRIPTION

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H9605**

Deck-mounted thermostatic SECURITHERM basin mixer.  
 Sequential thermostatic mixer: opens and closes with cold water.  
 No risk of cross flow between the hot and cold water.  
 No non-return valves on the inlets.  
 BIOCLIP: mixer is easy to remove for cleaning and disinfection.  
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
 Securitouch thermal insulation prevents burns.  
 Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.  
 Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.  
 Cold water temperature adjusts up to 40°C with temperature limiter set at 40°C.  
 Thermal and chemical shocks are possible.  
 Body and spout with smooth interiors and low water volume.  
 Flow rate limited to 5 lpm at 3 bar.  
 No manual contact thanks to Hygiene control lever L. 146mm.  
 No pop-up waste.  
 Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.  
 Fixing reinforced by 2 stainless steel rods.  
 Ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Mixer suitable for people with reduced mobility.  
 30-year warranty.  
 Also available with copper tails.

### TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H9605**

Connector	3/8"
Technology	SECURITHERM BIOCLIP sequential thermostatic mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	     
Warranty	

### ADVANTAGES



Maximum hygiene: mixer with no non-return valves




Hygiene: can be removed for internal cleaning



SECURITHERM: Optimal anti-scalding safety



Sequential: opens and closes with cold water

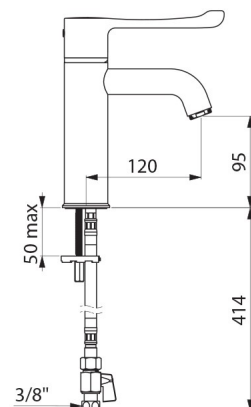

---

Repairability

