

# Shower kit with thermostatic mixer

Ref. H9739SHYG

Securitouch dual control thermostatic mixer

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9739SHYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:

- Shower mixer with scale-resistant, thermostatic cartridge:
- Mixer with anti-scalding failsafe: shuts off automatically if cold supply fails.
- Prevents cold showers: shuts off automatically if hot water supply fails.
- Scale-resistant thermostatic cartridge for temperature adjustment.
- ¼-turn ceramic head for flow rate adjustment.
- Temperature adjusts from 25 - 40°C with maximum temperature pre-set at 38°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate limited to 9 lpm at 3 bar.

Chrome-plated brass body with CLASSIC controls.

M1/2" shower outlet.

Filters and non-return valves integrated on the F3/4" inlets.

Mixer with offset standard wall connectors, M1/2" M3/4".

- Shower head (ref. 813) with chrome-plated wall-mounted tilting support (ref. 845).

- Auto-draining device FM1/2" for installation between the flexible hose and the shower head, automatically drains the shower head and flexible hose (reduces bacterial development) (ref. 880).

Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Mixer suitable for people with reduced mobility.

Shower mixer with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9739SHYG

|                     |                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------|
| Connector           | M1/2"                                                                                   |
| Technology          | SECURITHERM thermostatic mixer                                                          |
| Depth               | 73mm                                                                                    |
| Length              | 281mm                                                                                   |
| Width               | 280mm                                                                                   |
| Flow rate           | 9 lpm                                                                                   |
| Temperature limiter | 38°C                                                                                    |
| Finish              | Chrome-plated brass                                                                     |
| Norms               | ACS  |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Pre-set maximum temperature limiter



Automatically drains shower head and flexible hose



Thermostatic: total temperature stability

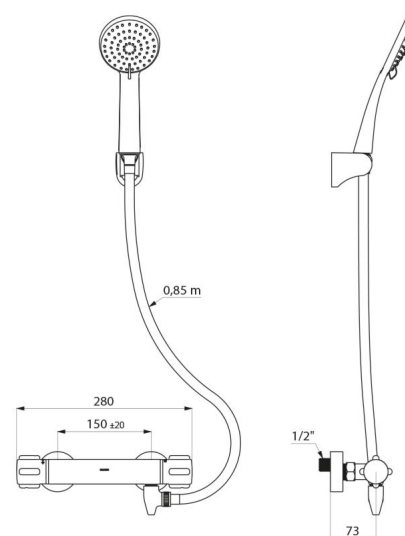

|               |                                                                                   |
|---------------|-----------------------------------------------------------------------------------|
| Warranty      |  |
| Repairability |  |