

# Shower kit with thermostatic mixer

Ref. H9739SKIT

Dual control thermostatic mixer

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9739SKIT

SECURITHERM dual control thermostatic shower kit:

- Shower mixer with scale-resistant, thermostatic cartridge: Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.

Prevents cold showers: shuts off automatically if hot water supply fails.

Scale-resistant thermostatic cartridge controls the temperature.

1/4-turn ceramic head for flow rate adjustment.

Temperature control from 25 - 40°C with temperature limiter set at 38°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate regulated at 9 lpm.

Chrome-plated body and CLASSIC controls.

M1/2" shower outlet.

F3/4" inlets with integrated filters and non-return valves.

Mixer with 2 offset standard wall connectors, M1/2" M3/4".

- Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).
- Shower hose retaining collar (ref. 830).

Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.



Thermostatic mixer suitable for people with reduced mobility.

Thermostatic mixer suitable for people with reduced mobility.

Shower kit with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9739SKIT

Connector	M1/2"
Technology	SECURITHERM thermostatic mixer
Depth	73mm
Length	281mm
Width	280mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS 
Warranty	



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Pre-set maximum temperature limiter



Thermostatic: total temperature stability



Ergonomic: controls are easy to grip

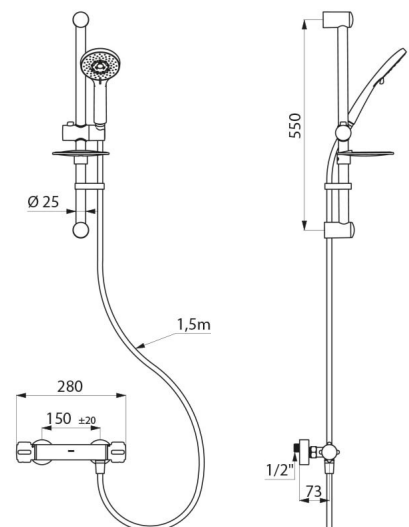

---

Repairability

