

# SECURITHERM thermostatic basin mixer

Ref. H96001

Single control thermostatic sequential mixer H. 95mm L. 120mm


## DESCRIPTION

**SECURITHERM thermostatic basin mixer - Ref. H96001**

Deck-mounted SECURITHERM thermostatic basin mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
No risk of cross flow between hot and cold water.  
No non-return valves on the inlets.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with straight spout H. 95mm L. 120mm and fitted with a hygienic flow straightener with no water retention and able to withstand thermal shocks.  
Scale-resistant thermostatic cartridge for single lever control of flow rate and temperature.  
Temperature control from cold water up to 40°C with maximum temperature limiter set at 40°C.  
Thermal or chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate limited to 5 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
F3/8" PEX flexibles.  
Reinforced fixing via 2 stainless steel rods.  
Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics.  
Mixer suitable for people with reduced mobility.  
Mixer with 30-year warranty.  
Also available with copper tails.

## TECHNICAL CHARACTERISTICS

**SECURITHERM thermostatic basin mixer - Ref. H96001**

Connector	F3/8"
Technology	SECURITHERM Securitouch sequential mixer
Height	95mm
Drop height	85mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS  



## ADVANTAGES



Sequential: opens/closes with cold water




Maximum hygiene: no non-return valves



SECURITHERM: optimal anti-scalding safety



Securitouch: thermal insulation prevents burns

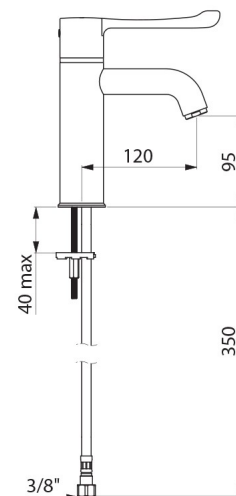

Warranty	
Repairability	