

SECURITHERM thermostatic basin mixer

Ref. H96001

Single control thermostatic sequential mixer H. 95mm L. 120mm





DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H96001





Deck-mounted SECURITHERM thermostatic basin mixer. Thermostatic sequential mixer: opens and closes with cold water. No risk of cross flow between hot and cold water. No non-return valves on the inlets. Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Single hole mixer with straight spout H. 95mm L. 120mm and fitted with a hygienic flow straightener with no water retention and able to withstand thermal shocks. Scale-resistant thermostatic cartridge for single lever control of flow rate and temperature. Temperature control from cold water up to 40°C with maximum temperature limiter set at 40°C. Thermal or chemical shocks are possible. Body and spout with smooth interiors and low water volume. Flow rate limited to 5 lpm at 3 bar. No manual contact thanks to Hygiene control lever L. 146mm. No pop-up waste. F3/8" PEX flexibles. Reinforced fixing via 2 stainless steel rods. Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics. Mixer suitable for people with reduced mobility. Mixer with 30-year warranty. Also available with copper tails.


TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic basin mixer - Ref. H96001

Connector	F3/8"
Technology	SECURITHERM Securitouch sequential mixer
Height	95mm
Drop height	85mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS  

ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

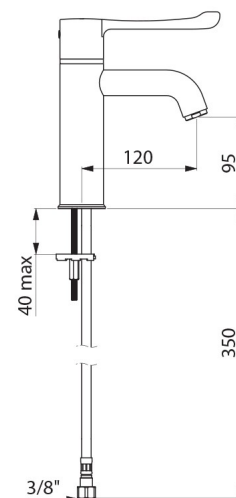

Warranty



Repairability

