Aluminium shower panel with SECURITHERM sequential mixer

Ref. H963915

Sequential thermostatic mixer

DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H963915

SECURITHERM anodised aluminium shower panel for wall-mounted exposed installation:
SECURITHERM sequential thermostatic mixer (non time flow).
Temperature control from cold water up to 39°C.
Maximum temperature limiter set at 39°C, can be adjusted.
Anti-scalding failsafe: automatic shut-off if cold or hot water supply fails. Thermal shocks are possible.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.
Hygiene control lever L. 100mm.
Top inlets with M1/2" stopcocks.
With copper tails.
Concealed fixings and filters.
30-year warranty.

ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- No non-return valves on inlets
- Thermostatic: total temperature stability
- Sequential open and closing on cold water

TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H963915
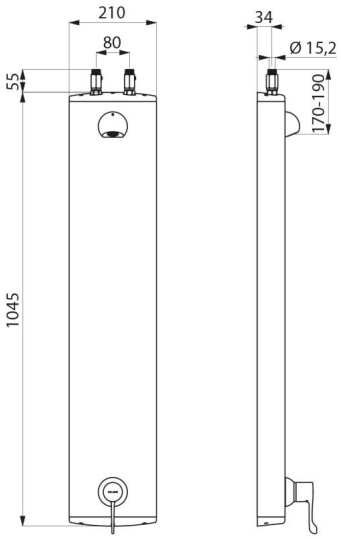
Supply	Top inlets via inline stopcocks M1/2"
Connector	M1/2", Ø 15mm
Technology	SECURITHERM single control thermostatic mixer
Height	1050mm
Width	210mm
Flow rate	6 lpm
Temperature limiter	39°C
Finish	Aluminium
Norms	WRAS
Warranty	30 YEAR WARRANTY