


TEMPOMIX 3 time flow basin mixer

Ref. 794250

Soft-touch operation, kit 2/2



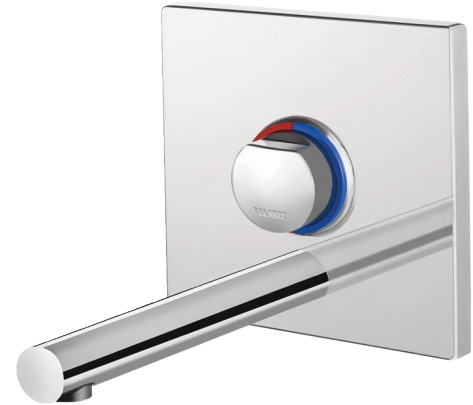


DESCRIPTION

TEMPOMIX 3 time flow basin mixer - Ref. 794250





Recessed TEMPOMIX 3 basin mixer kit 2/2:
 Tamperproof chrome-plated metal plate 160 x 160mm.
 Temperature control and operation via the push-button.
 Maximum temperature limiter (can be adjusted by installer).
 Soft-touch operation.
 Time flow ~7 seconds.
 Flow rate pre-set at 3 lpm at 3 bar pressure, can be adjusted 1.4 - 6 lpm.
 Scale-resistant flow straightener.
 Spout L. 190mm with smooth interior and low water volume (reduces niches where bacteria can develop).
 Suitable for people with reduced mobility.
 30-year warranty.
 Order with 794BOX3 waterproof housing.

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 time flow basin mixer - Ref. 794250

Connector	F½"
Technology	Time flow
Height	160mm
Width	160mm
Spout length	190mm
Flow rate	3 lpm
Norms	ACS  
Warranty	

ADVANTAGES

-  Exceptional water savings: 85%
-  Soft-touch operation, temperature selection
-  Installation recessed in wall
-  Adjustable modular waterproof housing

