


Waterproof housing for TEMPOSOFT 2 showers

Ref. 748BOX

Time flow, kit 1/2



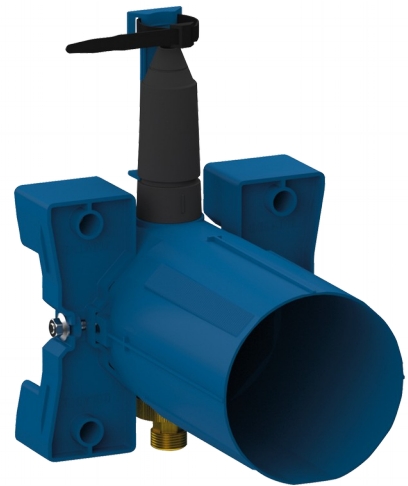



DESCRIPTION

Waterproof housing for TEMPOSOFT 2 showers - Ref. 748BOX

Recessed waterproof housing for TEMPOSOFT 2 showers kit 1/2 :
 Collar with waterproof seal.
 Hydraulic connection from the outside and maintenance from the front.
 Adjusts to all types of installations (rails, solid walls, panels).
 Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 93mm).
 Stopcocks and flow rate adjustment, filters, non-return valves and cartridge are all integrated and accessible from the front.
 Supplied in 2 kits: secure system flush without sensitive elements.
 30-year warranty.
 Order with control plate reference 748218 or complete shower kit 748219.

ADVANTAGES

-  Installation recessed in wall
-  Adjustable and modular waterproof housing
-  System tested to over 500,000 operations
-  100% waterproof housing

TECHNICAL CHARACTERISTICS

Waterproof housing for TEMPOSOFT 2 showers - Ref. 748BOX

Connector	1/2"
Technology	Time flow
Depth	10 - 120mm
Width	170mm
Warranty	