


# Waterproof housing for TEMPOSOFT 2 showers

Ref. 748BOX

Time flow, kit 1/2



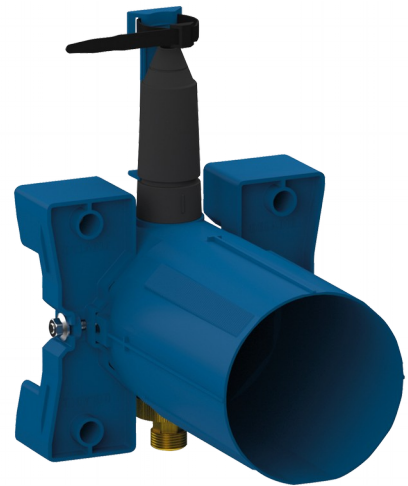



## DESCRIPTION

Waterproof housing for TEMPOSOFT 2 showers - Ref. 748BOX


Recessed waterproof housing for TEMPOSOFT 2 showers kit 1/2 :  
 Collar with waterproof seal.  
 Hydraulic connection from the outside and maintenance from the front.  
 Adjusts to all types of installations (rails, solid walls, panels).  
 Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 93mm).  
 Stopcocks and flow rate adjustment, filters, non-return valves and cartridge are all integrated and accessible from the front.  
 Supplied in 2 kits: secure system flush without sensitive elements.  
 30-year warranty.  
 Order with control plate reference 748218 or complete shower kit 748219.

## ADVANTAGES

-  Installation recessed in wall
-  Adjustable and modular waterproof housing
-  System tested to over 500,000 operations
-  100% waterproof housing

## TECHNICAL CHARACTERISTICS

Waterproof housing for TEMPOSOFT 2 showers - Ref. 748BOX

|            |   |
|------------|---|
| Connector  | 1/2"  |
| Technology | Time flow   |
| Depth      | 10 - 120mm  |
| Width      | 170mm   |
| Warranty   |  |

