

TEMPOMATIC 4 recessed housing for showers

Ref. 443PBOX

Batteries, kit 1/2

DESCRIPTION


TEMPOMATIC 4 recessed housing for showers - Ref. 443PBOX

Waterproof recessed housing for TEMPOMATIC 4 for showers, kit 1/2:
 Collar with waterproof seal.
 Hydraulic connection from the outside and maintenance from the front.
 Adjusts to all types of installations (rails, solid walls, panels).
 Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 93mm).
 Stopcocks and flow rate adjustment, filters, non-return valves and cartridge are all integrated and accessible from the front.
 Supplied in 2 kits: secure system flush without sensitive elements.
 30-year warranty.
 Order with control plate reference 443218.

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 recessed housing for showers - Ref. 443PBOX

| | |
|------------|---|
| Connector | 1/2" |
| Technology | Electronic |
| Depth | 10 - 120mm |
| Width | 170mm |
| Norms | ACS |
| Warranty |  |

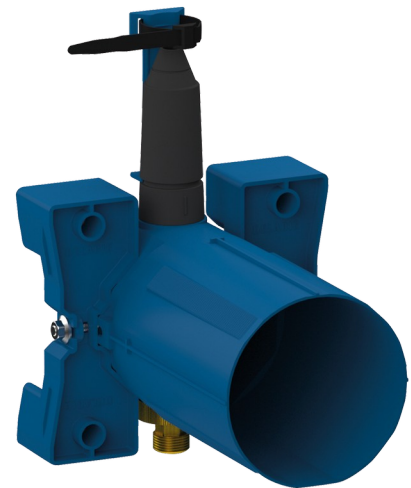

ADVANTAGES

-  Installation recessed in wall
-  Waterproof housing is adjustable and modular
-  System tested to over 500,000 operations
-  100% waterproof housing

