

# DELABIE



The essentials  
for public washrooms



Basins



Showers



WCS/Urinals



Washroom accessories

## CONTACTS

### HEAD OFFICE & PRODUCTION SITE

18, rue du Maréchal Foch  
80130 Friville  
FRANCE

delabie.com

### EXPORT


Tel. +33 (0)3 22 60 22 72  
export@delabie.fr

### QUOTES

Tel. +33 (0)3 22 60 22 72  
export.quotes@delabie.fr

### TECHNICAL SUPPORT


Tel. +33 (0)3 22 60 22 74  
Fax +33 (0)3 22 30 31 07  
sav@delabie.fr

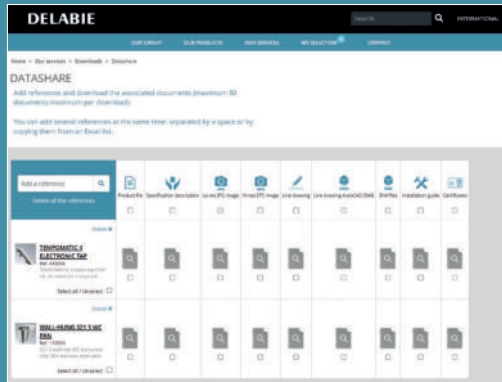

## DATASHARE: HUNDREDS OF FILES AVAILABLE TO DOWNLOAD

Instant access to our technical data.

Simply download all product data files for the references selected (product sheet, specification description, photos, line drawings, installation drawings, AutoCAD DWG, etc.).

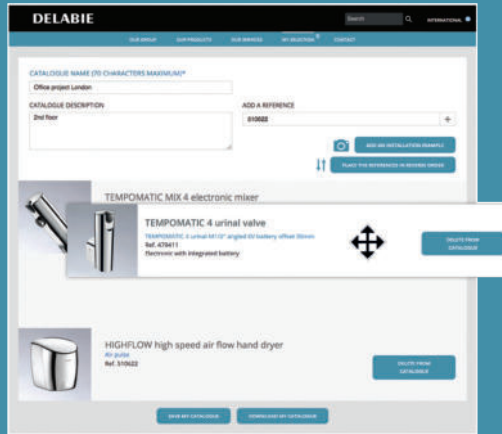


## CREATE A CUSTOMISED CATALOGUE

Create your own catalogue using your own product selection.

You can personalise it by giving it a project name and description, by choosing the order for the products to appear and by adding lifestyle images.

This catalogue will then be available in Word, PDF and Excel formats.

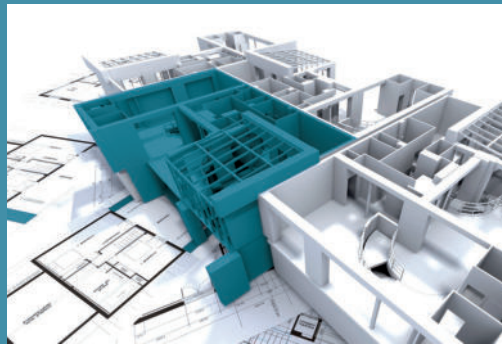


## BIM: DELABIE'S CORE PRODUCTS ARE NOW AVAILABLE

To meet the requirements of BIM technology, DELABIE has modelled its core products.

BIM files can be downloaded via the relevant product data sheet or via datashare.

The list of references available in BIM format is available in Our Services - BIM Files.

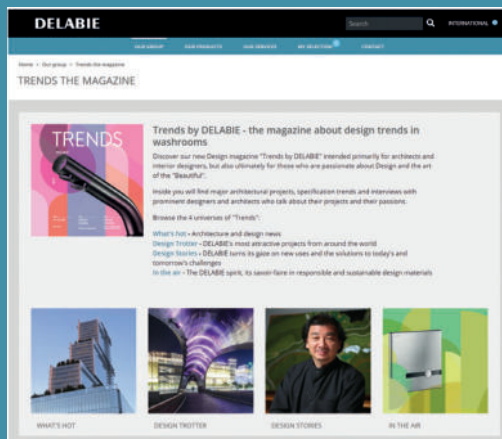

## TRENDS THE MAGAZINE: THE DESIGN TRENDS GUIDE

Browse the "Trends by DELABIE" magazine intended for those who are passionate about Design and the art of the "Beautiful".

Discover the 4 universes of Trends with major international projects, specification trends as well as interviews with prominent designers and architects who talk about their projects and their passions.



Certification  
ISO 9001:2015  
quality management  
systems

## ACS

### Certificate of Sanitary Conformity.

All DELABIE products conform to the CPDW\* directive modified 29/05/1997, and the French Ministry of Health circular DGS/SD7A2002 no. 571 dated 25/11/2002.

\* Construction Products in Contact with Drinking Water (European Commission).

DELABIE solutions

Pp. 2-3




Basin areas

Pp. 4-7




Shower areas

Pp. 8-11

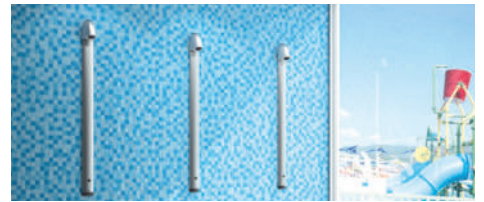

Urinals

Pp. 12-13

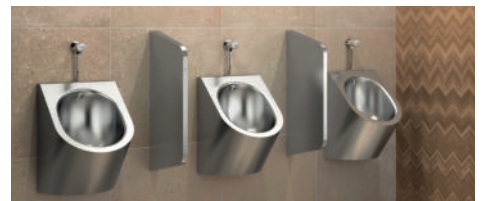

WCs

Pp. 14-15



Accessibility

Pp. 16-17




Professional catering

P. 18



Vandal-resistant

P. 19

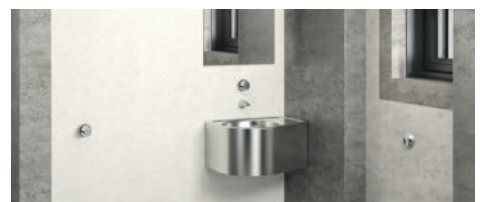

Our projects

Pp. 20-21

DELABIE is the undisputed European leader in the design of innovative and sustainable washroom solutions for **demanding public and commercial places**. Since 1928, we have been meeting the specific needs of high-traffic facilities such as airports, hospitals, schools, and leisure establishments. Our commitment is simple: to offer reliable, aesthetically pleasing, and environmentally friendly products while ensuring optimal comfort for users.




Zayed International Airport, Abu Dhabi - United Arab Emirates



Ferenc-Puskás Stadium, Budapest - Hungary



Hospital da Luz, Lisbon - Portugal

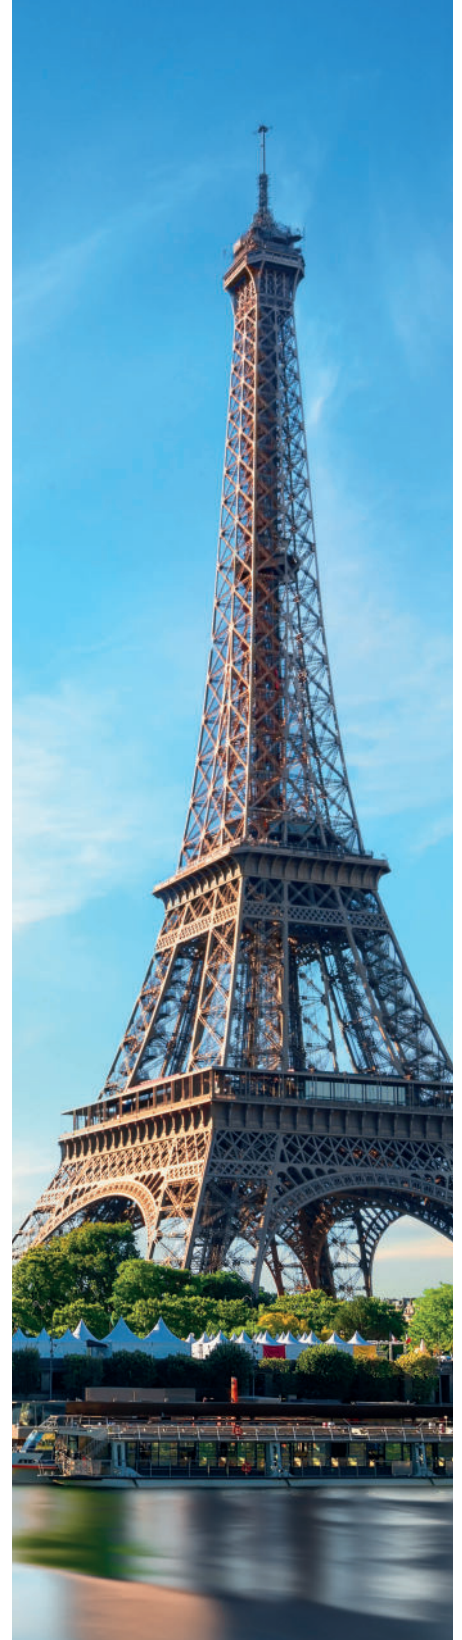

Eiffel Tower, Paris - France

By choosing DELABIE, you are opting for reliability, innovation, and design, supported by responsive customer service and sustainable solutions tailored to the challenges of public and commercial places.


## Expertise and dedication to excellence

Our products are designed to provide solutions tailored to all the requirements of **public and commercial places**, combining elegant design with exceptional durability. We understand that installations in public areas must not only be long-lasting, but also easy to maintain and use. Our ranges of water controls, stainless steel sanitary ware, accessibility solutions, and washroom accessories, embody this philosophy by ensuring intuitive use, minimal upkeep, and simplified maintenance. Thanks to our continuous innovation efforts, DELABIE is now recognized worldwide for its ability to offer reliable, vandal-resistant products that meet the highest standards of safety and hygiene.



## Water-saving and eco-friendly solutions

In a world where resource management is essential, DELABIE stands out with innovative technologies that enable up to **90% water savings**. Our electronic and time-flow taps, along with our touch-free solutions, ensure impeccable hygiene while minimizing water waste. Additionally, our stainless steel products, made from 100% recyclable material, reinforce our commitment to sustainable development, while offering unmatched resistance to intensive use conditions.



## Intelligent and robust design

At DELABIE, we believe that aesthetics and functionality go hand in hand. That's why our products are designed to blend seamlessly into public spaces, while withstanding daily wear and tear. The materials we use, such as bacteriostatic 304 stainless steel, ensure not only exceptional durability but also optimal protection against bacterial growth.



## Accessibility and comfort for all


When it comes to accessibility, DELABIE offers a comprehensive range of products that meet all regulatory requirements and user needs. Our solutions are designed to provide safety, comfort, hygiene, and maximum independence for people with reduced mobility. Thanks to ergonomic design and intuitive features, we guarantee a pleasant and inclusive user experience, regardless of physical condition.



## Durability and repairability: a long term commitment


At DELABIE, we are deeply committed to sustainability, as demonstrated by the robustness and repairability of our products. Designed to withstand the test of time and the intensive use of public and commercial places, our solutions come with a **30-year warranty** (excluding hand dryers: 3 years), a mark of quality and trust. We go even further by ensuring the **repairability of our products for 50 years**. This means that even after decades, our solutions can be repaired, reducing maintenance costs and promoting more responsible resource management.





## TEMPOMATIC 4 electronic tap

- ◆ No manual contact
- ◆ Reduced stagnation solenoid valve, electronic unit and batteries integrated into the body of the tap
- ◆ Flow rate pre-set at 3 lpm at 3 bar
- ◆ Scale-resistant flow straightener
- ◆ Duty flush (~60 seconds every 24 hours after last use)



## TEMPOMATIC 4 soap dispenser

- ◆ No manual contact
- ◆ Chrome-plated 304 stainless steel body
- ◆ No-waste pump dispenser
- ◆ Removable, separate electronic unit and tank
- ◆ Compatible with hydroalcoholic gel
- ◆ Supplied with a 1 litre tank
- ◆ CE marked



## HIGHFLOW Compact air pulse hand dryer

- ◆ High speed drying in 10 - 12 seconds
- ◆ Choice of warm or cold air
- ◆ Automatic hand dryer with infrared detection
- ◆ Stops automatically when hands are removed
- ◆ Anti-blocking: stops automatically if used continuously for more than 60 seconds
- ◆ One-piece cover in bacteriostatic 304 stainless steel
- ◆ Low energy consumption: 1,350W
- ◆ CE marked



## Stainless steel mirror

- ◆ Bacteriostatic 304 stainless steel «mirror» polished
- ◆ Concealed fixings
- ◆ Unbreakable

Tap	
Mains supply	440100
Battery-operated	440106
Mixer	
Mains supply	490100
Battery-operated	490106


Wall-mounted model is also available

Mains supply	512031P
Battery-operated	512036P

Wall-mounted model is also available

Bright polish 304 stainless steel	510625P
Satin finish 304 stainless steel	510625S

10 × 385 × 485mm	3452
10 × 485 × 585mm	3458
13 × 600 × 990mm	3459



## TEMPOMATIC 5 electronic tap

- ◆ No manual contact
- ◆ Reduced stagnation solenoid valve and electronic unit integrated into the body of the tap
- ◆ Flow rate pre-set at 3 lpm at 3 bar
- ◆ Scale-resistant flow straightener
- ◆ Duty flush (~60 seconds every 24 hours after last use)

Tap	
Mains supply	449100
Battery-operated	449106
Mixer	
Mains supply	499100
Battery-operated	499106



## BOB WC hand washbasin

- ◆ Wall-mounted hand washbasin
- ◆ Bacteriostatic 304 stainless steel Polished satin finish
- ◆ Vandal-resistant: shrouded basin, concealed trap
- ◆ Supplied with 1 1/2" waste and trap
- ◆ Without overflow
- ◆ CE marked. Complies with norm EN 14688
- ◆ Weight: 5.5 kg

Without taphole	120130
Without taphole	121130
Without taphole - With reinforced fixings	164130



## LAVANDO WC hand washbasin

- ◆ Wall-mounted hand washbasin
- ◆ Space saving: 450 × 300mm
- ◆ Bacteriostatic 304 stainless steel Polished satin finish
- ◆ Rounded edges prevent injury
- ◆ Supplied with waste 1 1/4"
- ◆ Without overflow
- ◆ CE marked. Complies with norm EN 14688
- ◆ Weight: 3.2 kg

With tap hole Ø35mm on left side	121360
With tap hole Ø35mm on right side	121370



## Electronic liquid soap dispenser


- ◆ No manual contact
- ◆ One-piece hinged cover with lock and standard DELABIE key
- ◆ No-waste pump dispenser
- ◆ Low battery indicator light
- ◆ Tank with large opening: easy to fill
- ◆ Compatible with hydroalcoholic gel
- ◆ CE marked

Bright 304 stainless steel, 0,5 L	512566P
Satin 304 stainless steel, 0,5 L	512566S
White powder-coated 304 stainless steel, 0,5 L	512566W
Matte black powder-coated 304 stainless steel, 0,5 L	512566BK
Bright 304 stainless steel, 1 L	512066P
Satin 304 stainless steel, 1 L	512066S
White powder-coated 304 stainless steel, 1 L	512066W
Matte black powder-coated 304 stainless steel, 1 L	512066BK

# Basin areas | time flow




CANAL wash trough - ref. 121300



## TEMPOSOFT 2 time flow tap

- ◆ Soft-touch operation
- ◆ Time flow ~7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted
- ◆ Tamperproof scale-resistant flow straightener
- ◆ Chrome-plated brass body
- ◆ Mixer model is also available



## TEMPOSTOP time flow tap

- ◆ Time flow ~7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm
- ◆ Tamperproof scale-resistant flow straightener
- ◆ Chrome-plated brass body



## PREMIX NANO thermostatic mixing valve

- ◆ For 1 to 2 taps or 1 shower
- ◆ Anti-scalding safety: automatic water shut-off in case of hot or cold water supply failure
- ◆ Temperature pre-set at 38°C, can be adjusted by the installer from 34 - 60°C
- ◆ Non-return valves and filters
- ◆ Minimum flow rate for operation: 3 lpm
- ◆ Thermal shocks are possible
- ◆ Inlets F $\frac{3}{8}$ " and outlet M $\frac{3}{8}$ "



## Liquid soap dispenser

- ◆ Soft-touch operation push button
- ◆ One-piece hinged cover with lock and standard DELABIE key
- ◆ No-waste, non-drip pump dispenser
- ◆ Anti-blocking: one dose per push even if button is held in place
- ◆ Tank with large opening: easy to fill
- ◆ Tank design prevents the long-term stagnation of soap
- ◆ Compatible with hydroalcoholic gel


Deck-mounted	
Fixing reinforced by back-nut with 3 stainless steel screws	740300
Fixing with back-nut	740500
Wall-mounted	
L. 110mm	741500
L. 150mm	741550
50mm chrome-plated extension	822741

Deck-mounted	
Fixing reinforced by back-nut with 3 stainless steel screws	745300
Fixing with back-nut	745100
Wall-mounted	
M $\frac{3}{8}$ "	744000
M $\frac{1}{2}$ "	746000
M $\frac{3}{8}$ " with escutcheon	746292
M $\frac{1}{2}$ " with AB system	746001

Nickel-plated body	732012
Chrome-plated body	732016

Bright 304 stainless steel, 0,5 L	510583
Satin 304 stainless steel, 0,5 L	510586
White powder-coated 304 stainless steel, 0,5 L	510584
Bright 304 stainless steel, 1 L	510580
Satin 304 stainless steel, 1 L	510582
White powder-coated 304 stainless steel, 1 L	510581





## TEMPOMIX 3 time flow mixer

- ◆ Soft-touch operation
- ◆ Temperature control and operation on the push-button
- ◆ Time flow ~7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm
- ◆ Non-return valves and filters
- ◆ Adjustable maximum temperature limiter

Deck-mounted	
Without stopcocks	794100
Wall-mounted	
L. 110mm	794050*
L. 190mm	794055*
Cross wall	
L. 110mm	794160
L. 190mm	794165

\* Order with nanny joint for recessed inlets ref. 794012



## Basin spouts

- ◆ Swivel, fixed or wall-mounted spouts for basins M½"
- ◆ Chrome-plated brass
- ◆ Scale-resistant flow straightener pre-set at 3 lpm

Swivel	
L. 150mm H. 120mm	967152
L. 200mm H. 200mm	967202
Fixed	
L. 140mm H. 120mm	981142
Wall-mounted	
L. 110mm	947120
L. 160mm	947170



## Hands-free water controls

- ◆ Time flow ~7 seconds or instant automatic shut off
- ◆ Tap models for mixed or cold water supply (TEMPOGENOU, MONOFOOT) or mixer MIXFOOT
- ◆ Brass body M½"

TEMPOGENOU knee-operated tap	
Inline, with stud nut bolt	735000
Inline	735400
Angled	734100
MIXFOOT pedal-operated mixer	
Floor-mounted	739100
MONOFOOT pedal-operated tap	
Floor-mounted	736101



## Stainless steel bin

- ◆ Wall-mounted bin for paper towels and waste paper
- ◆ Robust model
- ◆ Bacteriostatic 304 stainless steel

Bright polish 304 stainless steel, 20 litres	510465P
Satin finish 304 stainless steel, 20 litres	510465S
Bright polish 304 stainless steel, 25 litres	510461P
Satin finish 304 stainless steel, 25 litres	510461S
Bright polish 304 stainless steel, 38 litres	510463P
Satin finish 304 stainless steel, 38 litres	510463S



## SPORTING 2 electronic shower panel

- ◆ No manual contact: infrared presence detection, shower starts by passing hand 4cm from the sensor
- ◆ Anodised aluminium and chrome-plated satin finish
- ◆ Adjustable connector for top or back inlets
- ◆ Slimline structure with concealed fixings
- ◆ Voluntary shut-off or automatic after ~60 seconds
- ◆ Duty flush (~60 seconds every 24 hours after last use)
- ◆ Tamperproof, fixed shower head with automatic flow rate regulation
- ◆ Flow rate 6 lpm at 3 bar, comfortable rain-effect spray
- ◆ Accessible filter and integrated stopcock
- ◆ M $\frac{1}{2}$ " connection for mixed water supply

Mains supply	714800
Battery-operated	714806



## Floor trap

- ◆ Floor trap for hard floors (tiles or concrete)
- ◆ Flow rate 36 lpm (meets standards)
- ◆ Water level 50mm
- ◆ Bright polished stainless steel grid
- ◆ Height can be adjusted
- ◆ Horizontal (elbow joint not supplied) or vertical outlet  $\varnothing$ 40mm included in floor trap height
- ◆ Integrated waterproof seal
- ◆ Classified non-flammable (American certification UL94)


Grid 150 x 150mm	683001
Grid 100 x 100mm	682001



## PREMIUM NANO thermostatic mixing valve

- ◆ For 1 to 2 taps or 1 shower
- ◆ Anti-scalding safety: automatic water shut-off in case of hot or cold water supply failure
- ◆ Temperature pre-set at 38°C, can be adjusted by the installer from 34 - 60°C
- ◆ Non-return valves and filters
- ◆ Minimum flow rate for operation: 3 lpm
- ◆ Thermal shocks are possible
- ◆ Inlets F $\frac{3}{8}$ " and outlet M $\frac{3}{8}$ "

Nickel-plated body	732012
Chrome-plated body	732016

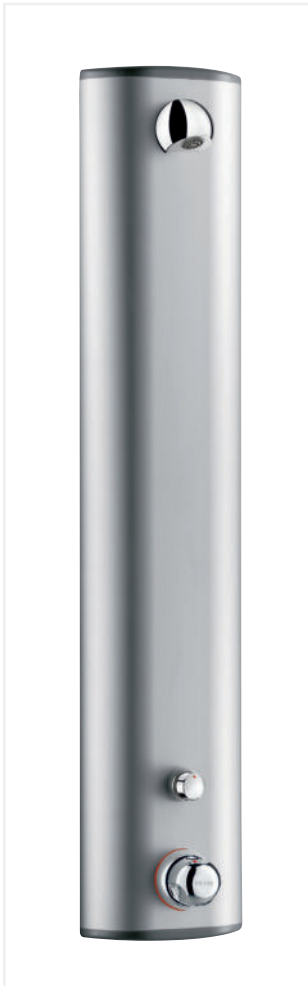

## SECURITHERM thermostatic time flow shower panel

- ◆ Soft-touch operation
- ◆ Time flow ~30 seconds
- ◆ Anodised aluminium shower panel for wall-mounted, exposed installation
- ◆ SECURITHERM thermostatic shower mixer
- ◆ Adjustable temperature control from cold water up to 38°C with 1<sup>st</sup> limiter set at 38°C and 2<sup>nd</sup> limiter set at 41°C
- ◆ Anti-scalding failsafe: automatic shut-off if cold water fails
- ◆ Prevents cold showers: automatic shut-off if hot water fails
- ◆ Thermal shocks are possible
- ◆ Chrome-plated, tamperproof ROUND shower head
- ◆ Flow rate 6 lpm at 3 bar, comfortable rain-effect spray
- ◆ Top inlets
- ◆ Stopcocks M1/2" with non-return valves and filters
- ◆ Concealed fixings

Thermostatic shower panel	792300
Cut-to-size extension	790152



## Wall-mounted soap dish

- ◆ Robust model
- ◆ Concealed fixings
- ◆ Dimensions: 60 × 160 × 40mm

Bayblend® chrome-plated matte finish	710500
Bayblend® chrome-plated bright finish	710501



## Single coat hook

- ◆ Bacteriostatic 304 stainless steel
- ◆ Concealed fixings
- ◆ Tube Ø20mm, 1mm thick

Short single coat hook - L. 65mm	
Bright polish 304 stainless steel	4043P
Satin finish 304 stainless steel	4043S
White powder-coated 304 stainless steel	4043EW
Matte black powder-coated 304 stainless steel	4043BK
Long single coat hook - L. 100mm	
Bright polish 304 stainless steel	4047P

# Shower areas | time flow



## TEMPOMIX 3 time flow shower mixer

- ◆ Soft-touch operation
- ◆ Temperature control and operation via the push-button
- ◆ Time flow ~30 seconds
- ◆ Flow rate pre-set at 6 lpm at 3 bar, can be adjusted, comfortable rain-effect spray
- ◆ Chrome-plated brass body
- ◆ Non-return valves and filters
- ◆ Adjustable temperature limiter
- ◆ Suitable for people with reduced mobility

Shower kit	794450
Mixer top outlet M $\frac{3}{4}$ "	794400
Mixer bottom outlet M $\frac{1}{2}$ "	794470



## TEMPOSTOP time flow shower valve

- ◆ For mixed water supply
- ◆ Time flow ~15 or 30 seconds (depending on model)
- ◆ Flow rate can be adjusted
- ◆ Wall-mounted, exposed or recessed installation
- ◆ Chrome-plated solid brass body


<b>M<math>\frac{1}{2}</math>" - Time flow ~15 seconds</b>	
Straight for inline inlet	747000
Angled for recessed inlet	748000
<b>M<math>\frac{3}{4}</math>" - Time flow ~30 seconds</b>	
Straight for inline inlet	749700
<b>F<math>\frac{1}{2}</math>" - Time flow ~30 seconds</b>	
Recessed - escutcheon Ø130mm	749128



## TEMPOSFT 2 time flow shower valve

- ◆ For mixed water supply
- ◆ Soft-touch operation
- ◆ Time flow ~30 seconds
- ◆ Flow rate pre-set at 6 lpm at 3 bar, can be adjusted
- ◆ Wall-mounted, exposed or recessed installation
- ◆ Chrome-plated solid brass body
- ◆ M $\frac{1}{2}$ " inlet
- ◆ Suitable for people with reduced mobility

Straight for inline inlet	747800
Angled for recessed inlet	748800
Recessed - escutcheon Ø130mm	749428



## TEMPOMIX time flow shower kit

- ◆ Soft-touch operation
- ◆ Temperature control and operation via the push-button
- ◆ Time flow ~30 seconds
- ◆ Flow rate 6 lpm at 3 bar, comfortable rain-effect spray
- ◆ Adjustable temperature limiter
- ◆ Variable recessing depth from 28 to 43mm
- ◆ Chrome-plated escutcheon Ø195mm
- ◆ Chrome-plated, tamperproof ROUND shower head
- ◆ M $\frac{1}{2}$ " inlets for copper tails Ø14mm
- ◆ Chrome-plated metal push-button
- ◆ Suitable for people with reduced mobility

Complete shower kit	790909
Recessed shower mixer only - escutcheon Ø195mm	790927
ROUND shower head	709000



## SPORTING 2 time flow shower panel

- ◆ Soft-touch operation
- ◆ Time flow ~30 seconds
- ◆ Anodised aluminium and chrome-plated satin finish panel
- ◆ Adjustable connector for top or back inlets
- ◆ Slimline structure with concealed fixings
- ◆ Tamperproof, fixed shower head with automatic flow rate regulation
- ◆ Flow rate 6 lpm at 3 bar, comfortable rain-effect spray
- ◆ Accessible filter and non-return valve
- ◆ Integrated stopcock
- ◆ M $\frac{1}{2}$ " inlet for mixed water supply
- ◆ Suitable for people with reduced mobility

SPORTING 2 714700



## PREMIX COMPACT thermostatic mixing valve

- ◆ For 1 to 11 points-of-use (depending on the flow rate)
- ◆ Anti-scalding safety: immediate shut-off if cold or hot water supply fails
- ◆ Temperature pre-set at 38°C, can be adjusted by the installer from 30 to 60°C
- ◆ Non-return valves and filters
- ◆ Recommended flow rate range: from 5 - 33 lpm
- ◆ Thermal shocks are possible

M $\frac{1}{2}$ " 733015  
M $\frac{3}{4}$ " 733020



## Soap dispenser specifically for showers

- ◆ 100% waterproof for installation in the shower
- ◆ Ergonomic push-button with soft-touch operation
- ◆ No-waste, non-drip pump dispenser
- ◆ Anti-blocking: single dose per press, even if the button is pressed for prolonged periods
- ◆ Concealed lid opening
- ◆ Window for monitoring soap level
- ◆ Tank with large opening: easy to fill
- ◆ For liquid soap

Anodised aluminium, 1 L 510579



AZA urinal divider - ref. 100620

## TEMPOFIX 3 frame system with TEMPOMATIC 4 electronic urinal valve

- Black powder-coated steel frame for wall-mounted installation
- Frame height can be adjusted
- Adjustable bracket from 95 - 280mm
- Complies with standard NF D12-208
- For panel depths up 120mm
- Fitted with TEMPOMATIC 4 electronic urinal valve F1/2":
  - 230/6V mains supply
  - 145 x 145mm control plate with integrated electronics
  - Recessed waterproof housing
  - Flow rate pre-set at 0.15 L/sec at 3 bar and high frequency mode (exclusive to DELABIE)
  - Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vacuums

### For urinals Ø35mm

Chrome finish stainless steel control plate	543000 +430010
Satin finish stainless steel control plate	543000 +430000
Black glass control plate	543000 +430030

### For urinals with flexible 1/2"

Chrome finish stainless steel control plate	543000D +430010
Satin finish stainless steel control plate	543000D +430000
Black glass control plate	543000D +430030



## TEMPOMATIC 4 electronic urinal valve

- No manual contact
- Integrated anti-stagnation solenoid valve, electronics and batteries
- 3 flush programmes
- High frequency mode (exclusive to DELABIE)
- Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vacuums
- Flow rate 0.15 L/sec at 3 bar, can be adjusted
- Integrated stopcock and flow rate limiter
- M1/2" connection


Inline (M1/2" outlet)	479410
Angled (M1/2" outlet)	479411
Angled with Ø35mm neck tube	479412
For DELABIE FINO urinals	479413
For DELABIE DELTA urinals	479414



## FINO stainless steel urinal

- Wall-hung rimless urinal in bacteriostatic 304 stainless steel Polished satin finish
- Quick and easy to install from the front thanks to a stainless steel mounting frame
- Exposed or recessed water inlet
- Recessed waste outlet Concealed trap
- Supplied with a P trap and fixing elements
- CE marked. Complies with European standard EN 13407 for a 2L flush
- Weight: 3.5 kg

Recessed inlet	135710
Exposed top inlet	135110



## DELTA stainless steel urinal

- ◆ Wall-hung rimless urinal in bacteriostatic 304 stainless steel Polished satin finish
- ◆ Quick and easy to install from the front thanks to a stainless steel mounting frame
- ◆ Exposed or recessed water inlet
- ◆ Recessed waste outlet  
Concealed trap
- ◆ Supplied with a P trap and fixing elements
- ◆ CE marked. Complies with European standard EN 13407 for a 2L flush
- ◆ Weight: 7.5 kg

## LISO urinal divider

- ◆ Bacteriostatic 304 stainless steel Polished satin finish
- ◆ Smooth surface and rounded edges
- ◆ Concealed fixings
- ◆ Supplied with fixing elements
- ◆ Weight: 8kg for the H. 700mm model and 13kg for the H. 950mm model

## TEMPOFLUX time flow urinal valve

- ◆ Soft-touch operation
- ◆ Time flow ~3 seconds
- ◆ Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted up to 0.3 L/sec
- ◆ Innovative stopcock and flow rate adjustment system integrated in the escutcheon (patented)
- ◆ CE marked. Complies with European standard EN 12541 (acoustic level class II)
- ◆ Body in chrome-plated brass M½"

## TEMPOSOFT 2 time flow urinal valve

- ◆ Soft-touch operation
- ◆ Time flow ~3 seconds
- ◆ Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted
- ◆ Body in chrome-plated brass M½"

Recessed inlet	134770
Recessed inlet with reinforced fixings	164770
Exposed inlet	134170
Exposed inlet and exposed waste outlet	134710

H. 700mm	100590
H. 950mm	100600

For urinals with exposed inlet Ø35mm	778755
For DELABIE DELTA urinals	778757
For DELABIE FINO urinals	778759

Exposed	
Straight for inline inlet	777800
Angled for recessed inlet	778800
Recessed	
Recessed with escutcheon	777130
For panels	777140



## TEMPOFLUX 1 WC flush valve

- ◆ Cistern-less flush WC
- ◆ Soft-touch operation
- ◆ Time flow ~7 seconds
- ◆ Base flow rate: 1 L/sec at 1 bar dynamic pressure
- ◆ Vacuum breaker
- ◆ Integrated stopcock and flow rate / flush volume rate adjuster
- ◆ Chrome-plated solid brass body and push-button
- ◆ Angled inlet M<sup>3</sup>/<sub>4</sub>"
- ◆ Supply pipe diameter: Ø20mm
- ◆ With stainless steel flush tube, collar and connection washer
- ◆ Compatible with rain water
- ◆ Suitable for people with reduced mobility

Time flow WC valve only 761001

Kit with tube, collar and connection washer 761003



## TEMPOCHASSE WC flush valve

- ◆ Cistern-less flush WC
- ◆ Exposed, wall-mounted installation
- ◆ Time flow ~7 seconds
- ◆ Base flow rate: 1 L/sec at 1 bar dynamic pressure
- ◆ Vacuum breaker
- ◆ Integrated stopcock and flow rate / flush volume rate adjuster F1"
- ◆ Chrome-plated solid brass body and push-button
- ◆ Shock-resistant mechanism
- ◆ Connection washer with clamp Ø32/55mm
- ◆ Bright polish stainless steel flush tube

### TEMPOCHASSE WC - exposed

With push-button	760000
Inline stopcock	764000
Angled stopcock	765000

### TEMPOCHASSE WC kit - exposed

With inline stopcock	760004
With angled stopcock	760005



## Toilet paper dispenser large model

- ◆ Bacteriostatic 304 stainless steel
- ◆ For 400m or 200m rolls
- ◆ One-piece hinged cover for easy maintenance and better hygiene
- ◆ Lock and standard DELABIE key
- ◆ With back-piece: protects paper
- ◆ Level control window

### For 200m rolls

Bright 304 stainless steel	510911P
Satin 304 stainless steel	510911S
White powder-coated 304 stainless steel	510911W
Matte black powder-coated 304 stainless steel	510911BK

### For 400m rolls

Bright 304 stainless steel	510910P
Satin 304 stainless steel	510910S
White powder-coated 304 stainless steel	510910W
Matte black powder-coated 304 stainless steel	510910BK



## Wall-mounted toilet brush set with lid

- ◆ Bacteriostatic 304 stainless steel
- ◆ Easy to clean: plastic bowl can be removed from above
- ◆ Plastic bowl with reservoir: avoids toilet brush sitting in residual water and reduces the risk of splashing when next used
- ◆ Toilet brush automatically centres itself in the holder
- ◆ Anti-theft locking
- ◆ Dimensions: Ø90 × 410mm
- ◆ Stainless steel body 1mm thick

Bright 304 stainless steel	4051P
Satin 304 stainless steel	4051S
White powder-coated 304 stainless steel	4051EW
Matte black powder-coated 304 stainless steel	4051BK





**TEMPOFIX 3 frame system & TEMPOFLUX 3 time flow WC flush valve**

- ◆ Cistern-less flush WC
- ◆ Self-supporting black powder-coated steel frame (or wall-mounted with anchoring bolts)
- ◆ Frame height can be adjusted from 0 to 200mm (with 1m marker)
- ◆ Ø100mm soil pipe
- ◆ For panel depths up to 120mm
- ◆ Complies with norm NFD12-208
- ◆ Mounted with TEMPOFLUX 3 time flow cistern-less flush valve F¾":
  - Recessed waterproof housing
  - Soft-touch operation
  - Dual flush control 3L/6L, can be adjusted to 2L/4L
  - AB anti-blocking system
  - Complies with European standard EN 12541 (acoustic level class II)



**Chrome-plated metal control plate**

Self-supporting frame system	564065 + 763040
Wall-mounted frame system	564060 + 763040

**Satin stainless steel control plate**

Self-supporting frame system	564065 + 763000
Wall-mounted frame system	564060 + 763000



**TEMPOFLUX 2 time flow WC flush valve**

- ◆ Cistern-less flush WC
- ◆ Dual flush control 3L/6L, can be adjusted to 2L/4L
- ◆ Soft-touch operation
- ◆ Vacuum breaker
- ◆ Integrated stopcock and flow rate / flush volume rate adjuster
- ◆ Brass body
- ◆ Inline inlet M¾"
- ◆ Outlet connection for PVC tube Ø26/32mm
- ◆ Complies with European standard EN 12541 (acoustic level class II)

Recessing depth can be adjusted from 0 to 20mm

762902



**S21 S and 700 S wall hung WC pans**

- ◆ Bacteriostatic 304 stainless steel Polished satin finish
- ◆ Easy to clean: one-piece pressed WC bowl with polished interior, seam-free
- ◆ Water savings: works with 4L or more of water
- ◆ Shrouded pan
- ◆ Quick and easy to install from the front thanks to a stainless steel mounting frame
- ◆ CE marked Complies with norm EN 997
- ◆ Weight: 11 kg for the S21 S model, 14.5 kg for the 700 S model

S21 S - L 535mm	110310
700 S - L 700mm - accessible model	110710



## SECURITHERM dual control thermostatic time flow shower panel

- ◆ Soft-touch operation time flow valve ~30 seconds
- ◆ Anodised aluminium shower panel for wall-mounted installation
- ◆ SECURITHERM thermostatic mixer
- ◆ Adjustable temperature control from cold water up to 38°C with 1<sup>st</sup> limiter set at 38°C and 2<sup>nd</sup> limiter set at 41°C
- ◆ Anti-scalding failsafe: automatic shut-off if cold water fails
- ◆ Prevents cold showers: automatic shut-off if hot water fails
- ◆ Thermal shocks are possible
- ◆ Chrome-plated, tamperproof ROUND shower head with flow rate 6 lpm at 3 bar, comfortable rain-effect spray
- ◆ Handset with removable flexible via push-fit rapid STOP connector and wall support supplied
- ◆ M $\frac{1}{2}$ " connections
- ◆ Non-return valves and filters

Top inlet via inline stopcocks	792320
Recessed inlet via flexibles	792330



## BASIC 135° grab bar

- ◆ White powder-coated stainless steel, Ø32mm
- ◆ Concealed fixings
- ◆ Max. recommended user weight: 135 kg
- ◆ CE marked

135° - 400 × 400mm	35082W
Straight - 300mm	35050W
Straight - 400mm	350504W
Straight - 500mm	350505W
Straight - 600mm	350506W
Drop-down - 760mm	511516W
Drop-down with leg - 760mm	511517W
T-shaped grab bar	35440W
Two-wall grab bar with sliding vertical bar	35481W



## Lift-up shower seat

- ◆ Folding leg guided by an articulated arm
- ◆ Wall-mounted with concealed fixings
- ◆ Height: 480mm
- ◆ Max. recommended user weight: 135 kg
- ◆ CE marked

Solid seat - W. 360mm	510405
ALU slatted seat - W. 360mm	510400
ALU wide slatted seat - W. 465mm	510410



**TEMPOMATIC  
electronic WC valve**

- ◆ Cistern-less flush WC
- ◆ No manual contact
- ◆ Voluntary activation (by passing the hand in front of the sensor) or automatic after the user leaves
- ◆ Mains supply with 1" solenoid valve
- ◆ 230/12V transformer
- ◆ Independent IP65 electronic unit
- ◆ Cross wall installation
- ◆ Time flow ~7 seconds, can be adjusted from 3 to 12 seconds
- ◆ Detection range and flow rate / flush volume can be adjusted
- ◆ Stopcock

For panels ≤ 30mm	463030
For panels ≤ 160mm	463150



**UltraPolish stainless steel  
135° grab bar**

- ◆ Bacteriostatic 304 stainless steel, Ø32mm
- ◆ Smooth, non-porous surface is hygienic and facilitates cleaning
- ◆ 40mm gap between the bar and the wall: minimal space prevents the forearm passing between bar and wall, reducing fracture risk in case of loss of balance
- ◆ Concealed fixings
- ◆ Maximum recommended user weight: 170 kg
- ◆ CE marked

135° - 400 × 400mm	5082P
Straight - 300mm	5050P2
Straight - 400mm	50504P2
Straight - 500mm	50505P2
Straight - 600mm	50506P2

Also available in satin finish



**UltraPolish stainless steel  
drop-down grab bar**

- ◆ Bacteriostatic 304 stainless steel, Ø32mm
- ◆ Smooth, non-porous surface is hygienic and facilitates cleaning
- ◆ Allows side access in the raised position
- ◆ Stored in upright position
- ◆ Slowed down descent
- ◆ Concealed fixings secured by a 4mm thick 304 stainless steel plate
- ◆ Max. recommended user weight: 135 kg for models without leg, 170 kg for models with leg
- ◆ CE marked

Drop-down - L. 650mm	510160P
Drop-down with leg - L. 650mm	510162P
Drop-down - L. 850mm	510164P
Drop-down with leg - L. 850mm	510170P

Also available in satin finish




**Wall-mounted toilet  
brush set with ergonomic  
handle extension**

- ◆ Bacteriostatic 304 stainless steel
- ◆ Easy to clean: plastic bowl can be removed from above
- ◆ Plastic bowl with reservoir: avoids toilet brush sitting in residual water and reduces risk of splashing when next used
- ◆ Toilet brush automatically centres itself in the holder
- ◆ Anti-theft locking
- ◆ Dimensions: Ø90 × 410mm
- ◆ Stainless steel body 1mm thick
- ◆ Ergonomic handle extension option: easy to use for people with reduced mobility, with difficulty bending over, and wheelchair users

Bright 304 stainless steel	4051P
Satin 304 stainless steel	4051S
White powder-coated 304 stainless steel	4051EW
Ergonomic handle extension	4051M




Auto-rewind stainless steel hose reel - ref. 5675T2



## Mixer tap 100 lpm

- ◆ Tubular swivel spout Ø22mm with star-shaped, brass flow straightener
- ◆ Water-free guided valve heads with reinforced mechanisms
- ◆ Shock-resistant, ergonomic ball levers
- ◆ Flow rate 100 lpm at 3 bar
- ◆ Full flow rate within half a turn
- ◆ Chrome-plated brass body and spout
- ◆ Soldered copper pipe water inlets
- ◆ Reinforced fixings

Mixer tap 100 lpm	5610
Mixer tap 100 lpm with riser column	5612



## Pre-rinse set

- ◆ Single hole deck-mounted mixer
- ◆ Bib tap with swivelling, tubular spout
- ◆ 1/2" scale-resistant hand spray with adjustable jet and 9 lpm flow rate at the outlet
- ◆ Reinforced, food-grade flexible hose L. 0,95m
- ◆ 3/4" Brass column, with adjustable wall bracket and stainless steel spring guide

Intensive professional grade	
With bib tap	5625
Without bib tap	5626
Intensive use	
With bib tap	G6632
Without bib tap	G6633



## SXS professional hand washbasin

- ◆ Knee-operated or electronic tap
- ◆ Complete hygiene: No manual contact with the tap
- ◆ Bacteriostatic 304 stainless steel Polished satin finish
- ◆ Water savings: flow rate pre-set at 3 lpm
- ◆ Mechanical model supplied with swan neck spout, soft-touch operation time flow tap and pre-mixer
- ◆ Electronic model supplied with chrome-plated mixer tap and soap dispenser
- ◆ CE marked. Complies with norm EN 14688

Knee-operated tap	
Without backsplash	182310
With backsplash	182320
Electronic tap	
Without backsplash	184310
With backsplash	184320




## Wall-mounted paper towel dispenser

- ◆ With lock and standard DELABIE key
- ◆ Level control window
- ◆ Dispenses one sheet at a time
- ◆ Capacity: 500 sheets
- ◆ Dimensions: 120 × 275 × 360mm

Bright polish 304 stainless steel	510601P
Satin finish 304 stainless steel	510601S
White powder-coated stainless steel	510601W
Matte black powder-coated stainless steel	510601BK



**Vandal-resistant washbasin DUO S TC L - ref. 160370**



## TC cross wall time flow basin taps & mixers

- ◆ Time flow ~7 seconds
- ◆ Flow rate pre-set at 3 lpm at 3 bar, can be adjusted
- ◆ Tamperproof scale-resistant flow straightener
- ◆ Tamperproof cross wall fixed spout L. 75mm
- ◆ System secured to the wall with anti-rotating pin
- ◆ Cut-to-size threaded rods



## TC cross wall time flow shower kit

- ◆ Flow rate pre-set at 6 lpm at 3 bar, can be adjusted, comfortable rain-effect spray
- ◆ Non-return valves and filters
- ◆ ROUND chrome-plated tamperproof shower head with automatic flow regulator
- ◆ Cut-to-size threaded rods



## TC cross wall cistern-less flush WC

- ◆ Soft-touch operation
- ◆ Vacuum breaker
- ◆ Integrated stopcock and flow rate / flush volume rate adjuster
- ◆ Inline inlet M $\frac{3}{4}$ "
- ◆ Cut-to-size threaded rod



## SHA XS recessed WC squat pan

- ◆ Floor-recessed squat WC pan
- ◆ Bacteriostatic 304 stainless steel Polished satin finish
- ◆ One-piece pressed WC bowl, seam-free for easy maintenance and better hygiene
- ◆ Non-slip foot area.
- ◆ Flushing system with one 304 stainless steel spreader

TEMPOMIX M $\frac{3}{4}$ " CW 220mm	
Single control mixer	795209
TEMPOSTOP AB M $\frac{1}{2}$ " CW 200mm	
Single control tap	748110
Dual control tap	748210

TEMPOMIX M $\frac{3}{4}$ " CW 220mm	
Shower mixer - Time flow ~30 seconds	796209
TEMPOSTOP M $\frac{1}{2}$ " CW 200mm	
Single feed shower - Time flow ~30 seconds	749110
Single feed shower - Time flow ~15 seconds AB anti-blocking system	747110

Electronic model is also available

TEMPOFLUX 2 - CW 140mm - Dual control 3L/6L (or 2L/4L)	
Kit with flush tube	762150
TEMPOFLUX 1 - CW 200mm - Single control	
Without flush tube	761110
Kit with flush tube	761210
TEMPOFLUX 3 AB - CW 200mm - Single control	
Without flush tube	763256
Kit with flush tube	763266

Electronic model is also available

Without trap	113710
With trap	113720

# They chose DELABIE

DELABIE exports to over **90 countries** from its factory in France and through its **10 subsidiaries** worldwide. Here is a non-exhaustive list of places where DELABIE products are installed.

## High turnover of users



© ADP

Sir-Seewoosagur-Ramgoolam  
International Airport - Mauritius

- Zagreb Airport - **Croatia**
- Dragon Mart Shopping Centre - **Dubai**
- Charles de Gaulle Airport - **France**
- Sir-Seewoosagur-Ramgoolam International Airport - **Mauritius**
- Mirqab Mall - **Qatar**
- Mecca - **Saudi Arabia**
- Tunis Carthage Airport - **Tunisia**

## Healthcare



© Vasconi Architectes

Tangier Hospital - Morocco

- Cleveland Clinic - **Abu Dhabi**
- San Juan de Deu - **Barcelona**
- Bordet Hospital - **Belgium**
- Abomey Calavi University Hospital - **Benin**
- Cayenne University Hospital - **French Guiana**
- 12 de Octubre Hospital - **Madrid**
- Centre Emma Ventura Care Home - **Martinique**
- University Hospital of **Martinique**
- Tangier University Hospital - **Morocco**
- Agadir University Hospital - **Morocco**
- Aman Hospital - **Qatar**
- University Hospital of **Reunion**
- Aga Khan Hospital - **Tanzania**

## Education



Sorbonne University in Paris - France

- Higher College of Technology - **Abu Dhabi**
- Sorbonne University - **France**
- University group of **Guadeloupe**
- St Georges de l'Oyapock School Complex - **Guyana**
- Latvijas University - **Latvia**
- American School - **Madagascar**
- University of **Martinique**
- Ashghal Schools - **Qatar**
- Cheikh Anta Diop de Dakar University- **Senegal**

## Secure sector



©NRC

National Rehabilitation Center -  
Abu Dhabi, United Arab Emirates

- Al Wathba Prison - **Abu Dhabi**
- Liepaja Prison - **Latvia**
- Coloane Prison - **Macao**
- Kragujevac Prison - **Serbia**
- National Rehabilitation Center - **United Arab Emirates**

## Leisure - Sport



Eiffel Tower - France

- Douera Stadium - **Algeria**
- Fitness First Workout Centre - **Bangkok**
- Reunification Stadium - **Cameroon**
- Olembe Omnisports Stadium - **Cameroon**
- Laguna Water Park - **Dubai**
- Eiffel Tower - **France**
- Training and Competition Centre 2024 Olympics - **France**
- House of Music project - **Hungary**
- Ferenc-Puskás Stadium - **Hungary**
- National Concert Hall in Dublin - **Ireland**
- Abidjan Exhibition Centre - **Ivory Coast**
- Convention Centre - **Morocco**
- City of Culture - **Tunisia**

## Tertiary - Administration



Bank of China

- Bank of **China**
- Palais de Justice, Paris - **France**
- Total Headquarters, Libreville - **Gabon**
- Central Bank Headquarters of **Iraq**
- Bonham Quay - **Ireland**
- Administrative Towers A & B (Ministry) - **Ivory Coast**
- Postel Tower - **Ivory Coast**
- Microsoft Offices - **Shanghai**
- Alstom Industrial Plant - **Spain**

**AVAILABLE DOCUMENTS:**



**DOC 609INT:** Water Controls for Public and Commercial Places

**DOC 900INT:** Water Controls for Healthcare Facilities and Retirement Homes

**DOC 950INT:** Accessibility and Independence - Hygiene Accessories for Public and Commercial Places

**DOC 750INT:** Stainless Steel Sanitary Ware

**DOC 200INT:** Water Controls for Professional Catering

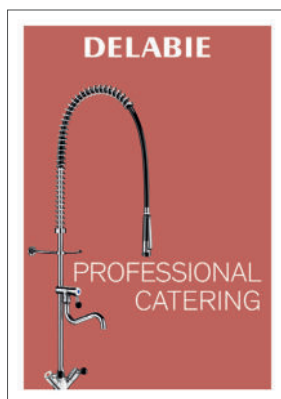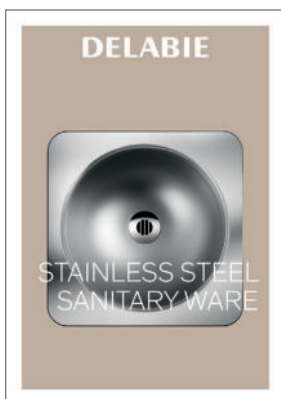

Your DELABIE distribution partner

# DELABIE

**EXPORT**

Tel. +33 (0)3 22 60 22 72  
export@delabie.fr

18, rue du Maréchal Foch  
80130 FRIVILLE - FRANCE

DELABIE S.A.S., share capital €999,600 - RCS 615 680 089 Amiens



delabie.com