

# Electronic sink mixer with BIOCLIP removable spout

Ref. 20871T1

Tall, single hole infrared mixer, disposable, swivelling spout

## DESCRIPTION

**Electronic sink mixer with BIOCLIP removable spout - Ref. 20871T1**

Deck-mounted electronic mixer.  
 Electronic mixer with high, swivelling, removable BIOCLIP spout H. 160mm.  
 Single hole mixer supplied with 1 disposable, recyclable Hostaform® spout L. 180mm Ø 22mm.  
 Independent IP65 electronic control unit.  
 Mains supply with 230/12V transformer.  
 Body and spout with smooth interiors (reduce niches where bacteria can develop).  
 Adjustable duty flush (pre-set flush for approximately 60 seconds every 24 hours after the last use) to prevent stagnation in the water supply if not used for prolonged periods.  
 Flow rate limited to 5 lpm at 3 bar.  
 Shock-resistant infrared presence detection sensor.  
 Chrome-plated brass body with reinforced fixing via 2 stainless steel rods.  
 Hygiene lever L. 100mm controls temperature.  
 PEX flexibles with filters and M3/8" solenoid valves.  
 Anti-blocking security.  
 Solenoid valves upstream of the mixing chamber.  
 Mixer ideal for healthcare facilities, retirement homes, hospitals and clinics.  
 Suitable for people with reduced mobility.  
 Mixer with 30-year warranty.  
 Two shut-off options:  
 - standard mode - timed flow with automatic shut-off;  
 - ON/OFF mode - user shuts off flow voluntarily or automatic shut-off after 30 minutes.  
 Thermal shocks are possible.  
 Position the sensor on the side of the mixer in ON/OFF mode.





## TECHNICAL CHARACTERISTICS


**Electronic sink mixer with BIOCLIP removable spout - Ref. 20871T1**

Supply	Mains supply 230/12V
Connector	M3/8"
Technology	Electronic
Height	280mm
Drop height	160mm
Spout length	180mm
Flow rate	5 lpm
Finish	Chrome-plated brass



## ADVANTAGES

-  Automatic anti-bacterial duty flush
-  Hygiene: removable spout for internal cleaning
-  Hygiene: smooth interior reduces bacteria
-  Water saving: split delivery

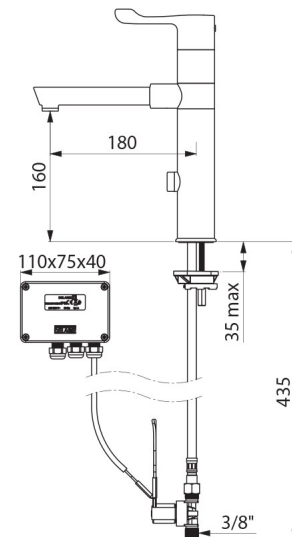

---

Norms



---

Warranty



---

Repairability

